T5 GNSS Receiver



T5 is a mini portable multifunctional GNSS receiver, a new generation of measurement engine, supporting tilt measurement, built-in 4G Modem, radio, Bluetooth and WIFI. It adopts a new appearance design, magnesium alloy structure and Linux operating system. It is an extremely light-weight and portable geodesic GNSS receiver.



Characteristic

Linux Intelligent System

ARM Cortex-A7 + Linux, the intelligent system platform, brings efficient computing and unlimited expansion of product functions to users.

Multi Constellation

With its 1408 channels, T5 provides an excellent on board real time navigation solution with high accuracy. All GNSS signals (GPS, GLONASS, BDS, GALILEO, QZSS, SBAS and IRNSS) are included.

Tilt Measurement

T5 has the IMU technology. Fast initialization and up to 60° inclination.

Combined Antenna

The new four in one antenna integrates GNSS, WIFI, Bluetooth and 4G, with smaller volume and better signal.

4G Modem


T5 has an internal 4G Modem that operates with more cellular network signals, a fast internet connection is guaranteed.

Long Endurance

Built in high-capacity lithium battery ensures continuous working time of more than 16 hours under normal operation.

IP65 Design

Industrial design, solid magnesium alloy shell, in line with IP65 design requirements, safe and reliable.

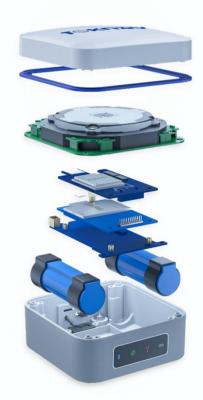



Europe, North & South America
Tel & WhatsApp: +1 (323) 847-7713 (lan)
Asia, Africa & Oceania
Tel & WhatsApp: +86 139 2607 5986 (Jeffrey)

T5 GNSS Receiver



	ITEM	SPECIFICATION	REMARKS
HARDWARE SYSTEM		ARM Cortex-A7 1.8GHz	
	os	Linux	
GNSS	GPS	L1C/A, L1C, L2P(Y), L2C, L5	PPP-B2b, PPP-E6, SBAS supported
	GLONASS	L1, L2, L3	
	BDS	B1I, B2I, B3I, B1C, B2a, B2b	
	GALILEO	E1, E5a, E5b, E6	
	QZSS	L1, L2, L5	
	SBAS	L1	
	NavIC (IRNSS)*	L5*	IRNSS support in future
	Channel	1408	
	Data format	NMEA-0183	
	Correction I / O Protocol	RTCM3.X	
	Data update frequency	5Hz (max)	
	Recapture Time	<1s	
	Cold Boot	<40s	
POSITIONING ACCURACY	Single (RMS)	Horizontal: 1.5m Vertical: 2.5m	
	DGPS (RMS)	Horizontal: 0.4m Vertical: 0.8m	
	RTK (RMS)	Horizontal: ±(8mm+1ppm) Vertical: ±(15mm+1ppm)	
	Time Accuracy (RMS)	20ns	
	Static Accuracy (RMS)	Horizontal: ±(2.5mm+0.5ppm) Vertical: ±(5mm+0.5ppm)	
	Speed Accuracy (RMS)	0.03m/s	
	Tilt compensation Accuracy (within 60°)	≤2cm	
	Bluetooth	BR+EDR+BLE	
	WIFI	802.11 b/g/n	
SYSTEM	Network	LTE FDD: B1/2/3/5/8 LTE TDD: B38/39/40/41 GSM: 900/1800MHz	
	Data Radio	Receive Only Frequency: 410~470MHz Protocol: TRIMTALK, TRIMMK3, SOUTH, TRANSEOT Air baud rate: 9600 / 19200bps	
	Storage	32GB Storage	
INDICATOR	Bluetooth Indicator	Show Bluetooth status	
	Satellite Indicator	Show position status	
	Data link Indicator	Show differential signal status	
	Power Indicator	Show power status	
	Battery	3.7V, 9600mAh	
BATTERY	Work time	More than 16 hours (Typical, Rover, GSM)	The static working mode supports continuous data collection for 24 hours under full power
	Charge	MTK PE+1.1/2.0 9V/2A USB PD 12V/1.25A	Support fast charging adapter and adaptively and dynamically adjust



Europe, North & South America Tel & WhatsApp: +1 (323) 847-7713 (lan) Asia, Africa & Oceania

Tel & WhatsApp: +86 139 2607 5986 (Jeffrey)



T5 GNSS Receiver



ENVIRONMENTAL	Work Temperature	-20℃~+60℃
	Storage Temperature	-40℃~+85℃
	Shock	Withstand 1.5M pole drop
	Protection	IP65
PHYSICAL	Material	Magnesium alloy main body, ABS/PC top cover
	Dimension	100.5mm*100.5mm*72mm
	Weight	≤0.63kg
A FULL SET	T5 Device	1SET
	USB power adapter	1PCS
	USB A To Type-C	1PCS
	Radio Antenna	1PCS
CERTIFICATION	Regulatory Compliance	NGS, CE, IGS

▲ Manufacturers may update parameters at any time, please refer to the latest product information.

▶ Equipped with electronic fence system, Toknav's product have area code restrictions. Any issue please contact Toknav or local dealers to verify the specific details.





